

Specialized In Electronic Weighing Apparatus

Since 2004

ZHEJIANG HAOYU INDUSTRY & TRADE CO., LTD.

Address: Gubux Road, Beihuoshan Industry Zone,

Wuxi, Jinhua City, Zhejiang Province, 321200

Tel: +86 579 87913000 Fax: +86 579 87913000

Email: info@zghaoyu.com

Web site: www.zghaoyu.com

Web site: zhaoyu.en.alibaba.com



RS-232 Program

USB Port is also available

Not only show weight on computer, but also a professional Database Administrator

Model No.: HY918 8

^ W Œ ] } u % μ Ÿ v P ^ o

K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ } š Ÿ } v

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G,

30KG/5G, 40KG/10G

Voltage: AC110/220V 50/60Hz

% % o ] Ÿ } v } (

© Œ Ç W > r ] ð s l ð Z

W o © Œ ^ ] ì W ï ð ï Æ ï ï u u

Main Material: ABS, 430 Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

/ v š Œ ( W Z ^ ï ï ] • } % Ÿ } v o

[SAVE]

o ] v š • ] v ( } u Ÿ } v W / v % μ š š Z o ] v š • – v u U % Z } v v μ u Œ U Œ  
μ • ] v • • Z } Œ W t ] P Z š U μ v ] š % Œ ] U š } š o À o μ U P } } • • Œ ] %

Unit Price: Save hundreds unit price, and can import/export data.

[Record]

/ v ( μ ] Œ } Œ } o o Ÿ v P š Z • o • Œ } Œ } ( o ] v š • v u U Á ] P Z š U μ v

[Mark]

^ š š Z } u % o ] u v š Œ Ç o } • } ( % Œ ] v Ÿ v P U } v v š š } % Œ ] v š Œ š }

Classic Model

Model No.: HY208

^ W Œ ] } u % μ Ÿ v P ^ o  
K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ } š Ÿ } v

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G,

30KG/5G, 40KG/10G

Weigh Unit: KG & LB

Voltage: AC110/220V 50/60Hz

© Œ Ç W > r ] ð s l ð Z

W o © Œ ^ ] Ì W ï ï Æ ï ï u u

Main Material: ABS, 430 Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

Model No.: HY308

^ W Œ ] } u % μ Ÿ v P ^ o  
K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ } š Ÿ } v

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G,

30KG/5G, 40KG/10G

Weigh Unit: KG & LB

Voltage: AC110/220V 50/60Hz

© Œ Ç W > r ] ð s l ð Z

W o © Œ ^ ] Ì W ï ï Æ ï ï u u

Main Material: ABS, 430 Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

Big display & 60KG ma

Model No.: HY888B B

\_\_\_\_\_ } u % μ Ÿ v P ^ o

K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ } š

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G, 30KG/5G, 40KG/10G, 60KG/10G

Voltage: AC110/220V 50/60Hz

\_\_\_\_\_ © Œ Ç W > \_\_\_\_\_ r ] ð s l ð Z

W o © Œ ^ ] ð W ï ï Æ ï ï u u

Main Material: ABS, 430 Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

/ v š Œ ( \_\_\_\_\_ W Z ^ ï ï ] • } % Ÿ } v o

Back side Display

Model No.: HY610

\_\_\_\_\_ } u % μ Ÿ v P ^ o

K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ } š Ÿ } v

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G, 30KG/5G, 40KG/10G, 60KG/10G

Voltage: AC110/220V 50/60Hz

K % Ÿ } v o } o } Œ

\_\_\_\_\_ © Œ Ç W > \_\_\_\_\_ r ] ð s l ð Z

W o © Œ ^ ] ð W ï ð ñ Æ ï ð ñ u u

Main Material: ABS, 430 Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

Model No.: HY408 8

^ W Œ ] } u % μ Ÿ v P ^ o

K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ } Stainless Steel Housing

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G, 30KG/5G, 40KG/10G

Voltage: AC110/220V 50/60Hz

© Œ Ç W > r ] ð s l ð Z

W o © Œ ^ ] Ì W ï ï Æ ï ï u u

Main Material: 430 Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

W } A Œ ^ } μ Œ W Z Z Œ P

Model No.: HY588 8

^ W Œ ] } u % μ Ÿ v P ^ o

K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G, 30KG/5G,  
40KG/10G

Voltage: AC110/220V 50/60Hz

© Œ Ç W > r ] ð s l ð Z

W o © Œ ^ ] Ì W ï ï Æ ï ï u u

Main Material: ABS, 430 Stainless Steel

Model No.: HY888 8

^ W Œ ] } u % μ Ÿ v P ^ o

K À Œ Z Œ P ~ K À Œ ] • Z Œ P % Œ } š

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G, 30KG/5G, 40KG/10G

Voltage: AC110/220V 50/60Hz

© Œ Ç W > r ] ð s l ð Z

W o © Œ ^ ] i W ï ï Æ ï ï u u

Main Material: 430 Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

^ } o Œ W v o ] • } % Ÿ } v o

CE & TSE Approved

RS232 interface

] r • Ÿ v P o μ

Æ š Œ v o

Model No.: HY128 8

^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity: 3KG, 6KG, 15KG, 30KG & Dual division

] r • Ÿ v P o μ u ] v μ u o o } Ç ( Œ u

Æ š Œ v o ð s l ð Z © Œ Ç U • Ç š }

Weigh Unit: KG & LB

Working Environment: 0~40°C, Humidity R.H < 95%

Model No.: HY666 S

\_\_\_\_\_ ^ W Œ ] \_\_\_\_\_ } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G,

15KG/5G, 30KG/5G

\_\_\_\_\_ © Œ Ç W > \_\_\_\_\_ r ] ð sl ð Z

W o © Œ ^ ] Ì W î ò ì Æ î ñ u u

Industrial Scale

High Accuracy Load Ce

Model No.: HY666S S

\_\_\_\_\_ ^ } μ v Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity: 3KG/0.1G, 6KG/0.2G,

15KG/0.5G, 30KG/1G

\_\_\_\_\_ © Œ Ç W > \_\_\_\_\_ r ] ò sl ð Z

W o © Œ ^ ] Ì W î ò ì Æ î ñ u u

Model No.: HY888S S

\_\_\_\_\_ ^ } μ v Ÿ v P ^ o

High precision load cell

Display: LED/LCD + backlight

Capacity: 3KG/0.1G, 6KG/0.2G, 15KG/0.5G, 30KG/1G, 40KG/1G

\_\_\_\_\_ © Œ Ç W > \_\_\_\_\_ r ] ò sl ð Z

W o © Œ ^ ] Ì W ï ï ì Æ î ñ u u

Input Voltage: AC110/220V 50/60HZ

D ] v D š Œ ] o W ð ï ì ^ š ] v o • • ^ š o U E Á ^ W o • Ÿ } Ç

%o %o o] Y)v )( /v

Model No.: HY666Z Z

\_\_\_\_\_ ^ t ] P Z ] v P ~ \_\_\_\_\_ } μ v Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity: 3KG/0.1G, 6KG/0.2G,

15KG/0.5G, 30KG/1G

\_\_\_\_\_ © Œ Ç W > \_\_\_\_\_ r ] ð sl ð Z

W o © Œ ^ ] Ì W î ò ì Æ î ñ u u



Model No.: T5-11H

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

60KG/10G Pan Size: 300x400mm

100KG/20G Pan Size: 300x400mm

150KG/50G Pan Size: 400x500mm

300KG/100G Pan Size: 400x500mm

D ] v D š Œ ] o W / Œ } v & Œ u ~ W o • Ÿ / v ] š } Œ

© Œ Ç W > r ] © Œ Ç ð s | ð Z

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ] • Z Œ P

Model No.: T5-Mini

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

60KG/10G Pan Size: 300x340mm

Main Material: Carbon Steel Frame & Wooden Plate

© Œ Ç W > r ] © Œ Ç ð s | ð Z

Model No.: T3-Mini01/T3-Mini02

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

60KG/10G Pan Size: 300x340mm

Main Material: Carbon Steel Frame & Wooden Plate

© Œ Ç W > r ] © Œ Ç ð s l ð Z

Voltage: AC110/220V 50/60HZ

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ] • Z Œ P

Double Side Display

Z ^ T T T ] • } % Ÿ

Model No.: T1-21L

Stainless Steel Indicator

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

60KG/10G Pan Size: 300x400mm

100KG/20G Pan Size: 300x400mm

150KG/50G Pan Size: 400x500mm

300KG/100G Pan Size: 400x500mm

500KG/200G Pan Size: 450x600mm

Model No.: T6D-21L

W } Á Œ ^ } μ Œ W Z Z Œ P

Model No.: T1-21Y

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

60KG/10G Pan Size: 300x400mm

100KG/20G Pan Size: 300x400mm

150KG/50G Pan Size: 400x500mm

300KG/100G Pan Size: 400x500mm

500KG/200G Pan Size: 450x600mm

Main Material: Carbon Steel Frame & SS Indicator

© Œ Ç W > r ] © Œ Ç ð s l ð Z

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ]

Foldable Solar Panel

Good for outdoor using

Model No.: T6T-21L

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

60KG/10G Pan Size: 300x400mm

100KG/20G Pan Size: 300x400mm

150KG/50G Pan Size: 400x500mm

300KG/100G Pan Size: 400x500mm

500KG/200G Pan Size: 450x600mm

D ] v D š Œ ] o W Œ } v ^ š o U ^ W o • Ÿ

© Œ Ç W > r ] © Œ Ç ð s l ð Z

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ] • Z Œ P

Model No.: T12-61B

Model No.: T12-61B

Display: LED/LCD + backlight

Capacity:

60KG/10G Pan Size: 300x400mm

100KG/20G Pan Size: 300x400mm

150KG/50G Pan Size: 400x500mm

300KG/100G Pan Size: 400x500mm

500KG/200G Pan Size: 450x600mm

Voltage: AC110/220V 50/60HZ

Main Material: Stainless Steel

Working Environment: 0~40°C, Humidity R.H < 95%

Model No.: T12-61B

100% Stainless Steel

Waterproof Load Cell

Model No.: T16-61B

Model No.: T16-61B

Display: LED/LCD + backlight

Capacity:

60KG/1G Pan Size: 300x400mm

100KG/2G Pan Size: 300x400mm

150KG/5G Pan Size: 400x500mm

300KG/10G Pan Size: 400x500mm

500KG/20G Pan Size: 450x600mm

Main Material: Stainless Steel

Model No.: T16-61B

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

Model No.: T16-61B

100% Stainless Steel

W o

Model No.: T4S-21L

d ^ } μ v Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

60KG/1G Pan Size: 300x400mm

100KG/2G Pan Size: 300x400mm

150KG/5G Pan Size: 400x500mm

300KG/10G Pan Size: 400x500mm

500KG/20G Pan Size: 450x600mm

Main Material: Carbon Steel

© Œ Ç W > r ] © Œ Ç ò s l ð Z

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ]

t ] P Z ] v P ~ } μ v Ÿ v P ^ o

Z ^ i i i l h ^ % } Œ š ] •

K % } Ÿ } v o } o } Œ W

Model No.: T4Z-21L

d ^ t ] P Z ] v P ~ } μ v Ÿ v P ^ o

Main Material: Carbon Steel

Display: LED/LCD + backlight

© Œ Ç W > r ] © Œ Ç ò s l ð Z

Capacity:

Voltage: AC110/220V 50/60HZ

60KG/1G Pan Size: 300x400mm

Working Environment: 0~40°C, Humidity R.H < 95%

100KG/2G Pan Size: 300x400mm

150KG/5G Pan Size: 400x500mm

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ] • Z Œ P

300KG/10G Pan Size: 400x500mm

500KG/20G Pan Size: 450x600mm

HEAVY DUTY

Model No.: T13-HL

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

300KG/100G Pan Size: 500x700mm

500KG/200G Pan Size: 600x800mm

1000KG/500G Pan Size: 800x800mm

Customized capacity & Pan size is OK.

Main Material: Carbon Steel Frame & SS Indicator

© Œ Ç W > r ] © Œ Ç ð s l ð Z

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ] • Z Œ P

Stainless Steel Keyboard

Model No.: T10-42L

d ^ W Œ ] } u % μ Ÿ v P ^ o

Display: LED/LCD + backlight

Capacity:

300KG/100G Pan Size: 400x500mm

500KG/200G Pan Size: 450x600mm

1000KG/500G Pan Size: 600x800mm

Main Material: Carbon Steel Frame & SS Indicator

© Œ Ç W > r ] © Œ Ç ð s l ð Z

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

W Œ } š Ÿ } v W K À Œ Z Œ P ~ K À Œ ]

WIRELESS & PORTABLE

Model Number: HYST

Model Number: HYST

Capacity: 500KG/200G

Display: LED/LCD + backlight

Capacity:

500KG/200G Pan Size: 500x700mm

Packing Size: 730x530x160mm

1000KG/500G Pan Size: 600x900mm

Packing Size: 930x630x160mm

Customized is available

360° rotatable indicator

4 wheels, easy to move

Rear wheels with brake

Small, smart and safe packing

Model Number: HYST

Portable floor scale

Wired / Wireless indicator

Display: LED/LCD + backlight

Capacity:

300KG/100G Pan Size: 400x500mm

500KG/200G Pan Size: 450x600mm

OEM pan size, shape and capacity is available.

Voltage: AC110/220V 50/60HZ

Voltage: AC110/220V 50/60HZ

Working Environment: 0~40°C, Humidity R.H < 95%

Small, smart and safe packing

Z^iii }vv Y

### Floor Scale

Wired / Wireless indicator

Display: LED/LCD + backlight

#### Capacity:

1T - 3T Pan Size: 1M\*1M, 1.2\*1.2M, 1.2M\*1.5M, 1.5M\*1.5M, 1.6M\*2M, 2M\*2M, 2M\*3M

3 - 10T Pan Size: 2.0M\*2.0M, 2.0M\*2.5M, 2.0M\*3.0M

OEM pan size, shape and capacity is available.











Working Environment: 0~40°C, Humidity R.H < 95%

Wœ}š Ÿ}vW KÀ œ Z œP ~ KÀ œ ]• Z œP



PLASTIC HOUSING SERIES

STAINLESS STEEL HOUSING SERIES

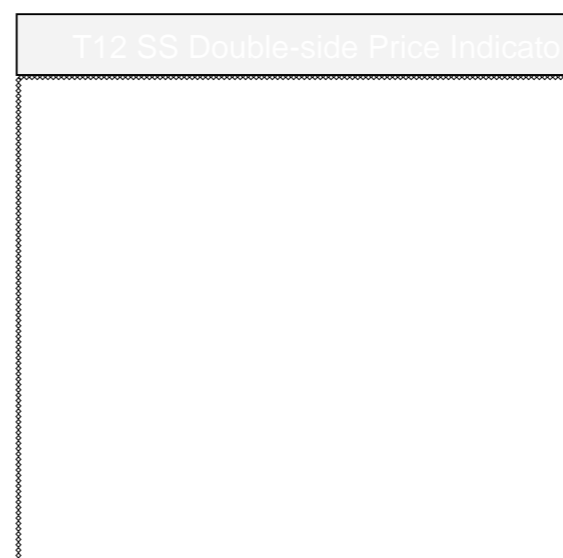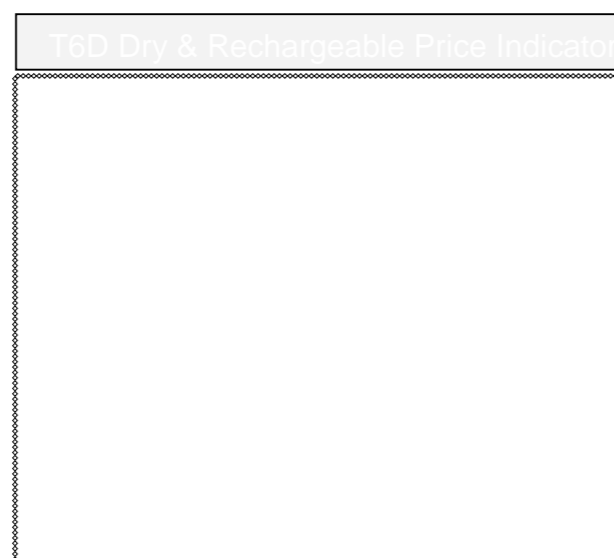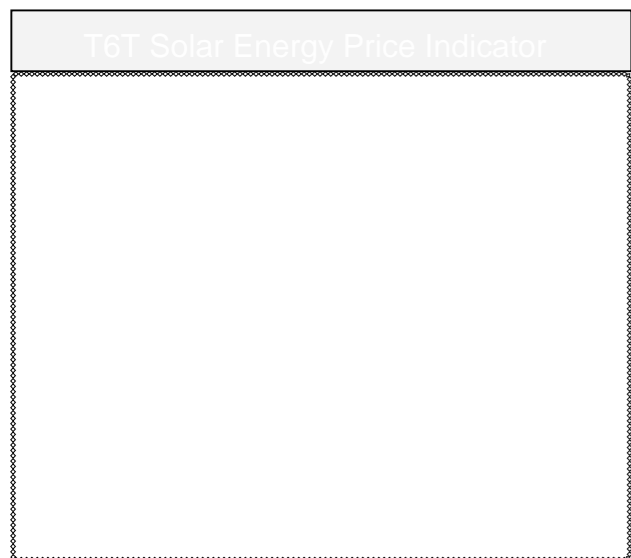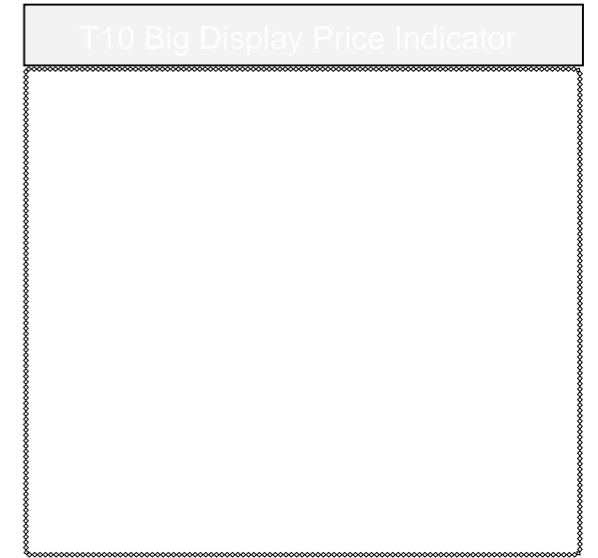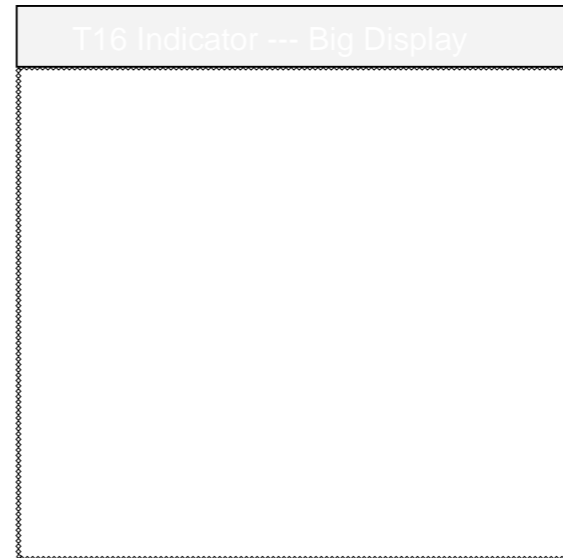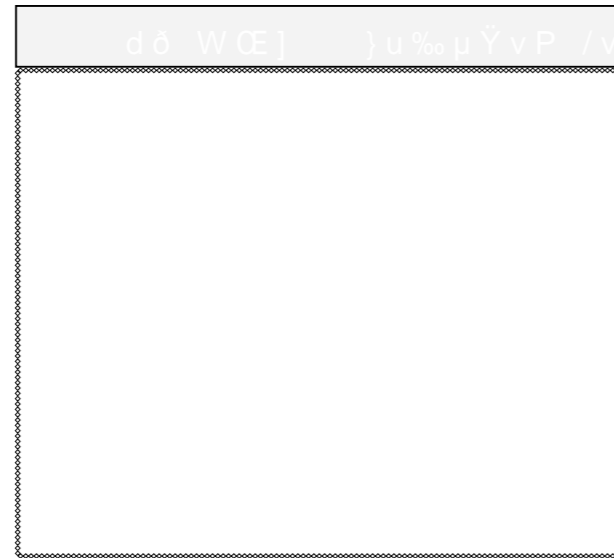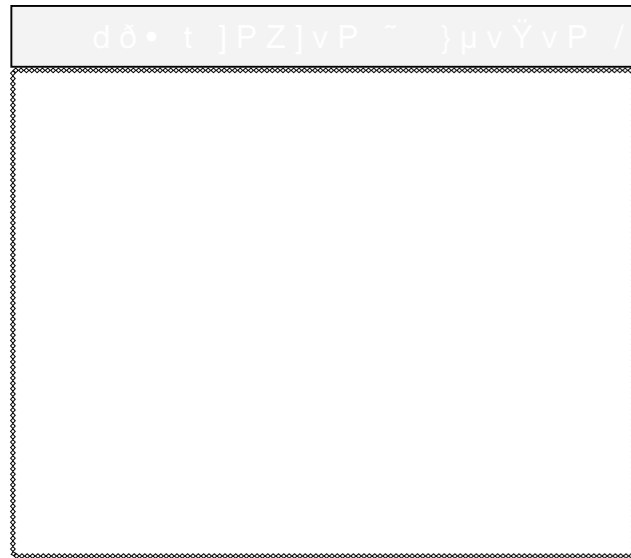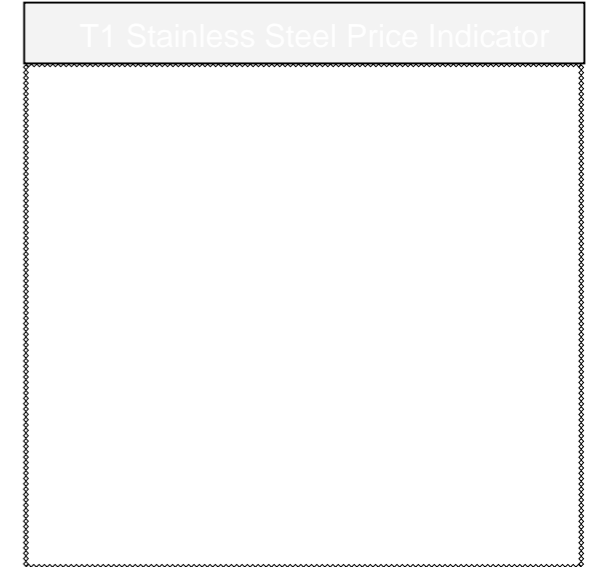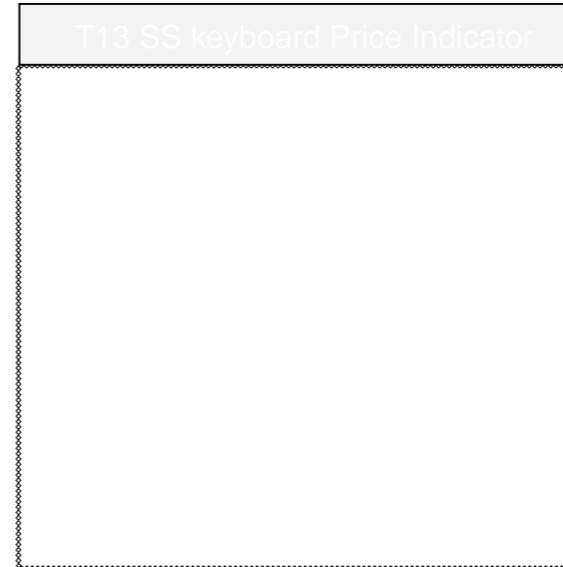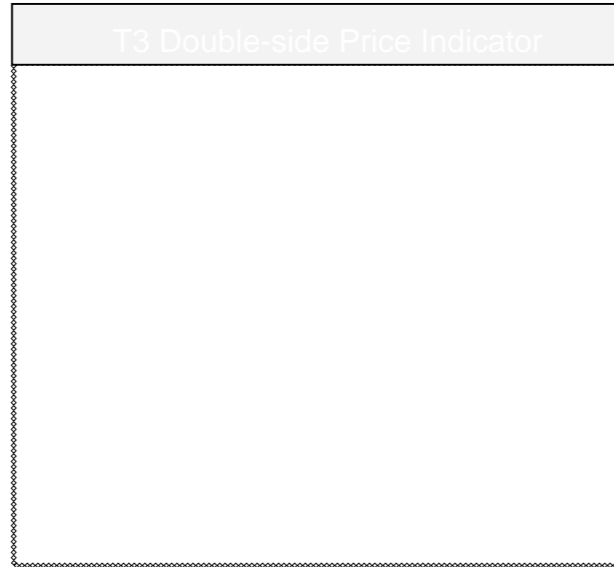

Remark: Electronic indicator can be  
u š Z Á]šZ ]+ Œ v š %o ž }  
& sold separately.

Model No.: OCS-0202

Display: LED/LCD + backlight

Capacity: 300KG/100G, 500KG/200G

Voltage: AC110/220V 50/60Hz

© ŒÇW > r ] ðslí Z

Working Environment: 0~40°C,

Humidity R.H < 95%

WŒ}š Ÿ}vW KÀ Œ Z ŒP ~ KÀ Œ ]• Z ŒP

Remote Control

Model No.: OCS-0101

A μš } š μŒv }+ U • À %}Á Œ v © ŒÇ o]( •%o v  
Remote controller, easy to operate

Display: LED/LCD + backlight

Capacity: 1T/200G, 3T/500G, 5T/1KG, 10T/2KG

Voltage: AC110/220V 50/60Hz

© ŒÇW > r ] òslð Z

Working Environment: 0~40°C,

Humidity R.H < 95%

WŒ}š Ÿ}vW KÀ Œ Z ŒP ~ KÀ Œ ]• Z ŒP

Model No.: OCS-0303

^ WŒ] }u%μ ŸvP ^ o

KÀ Œ Z ŒP ~ KÀ Œ ]• Z ŒP %Œ}

Display: LED/LCD + backlight

Capacity: 3KG/1G, 6KG/2G, 15KG/5G, 30KG/5G,

Voltage: AC110/220V 50/60Hz

© ŒÇW > r ] ðslð Z

W o © Œ ^]ì W îðiuu

Packing:  
345x395x155mm 1pc/box,  
350x400x775mm 5pcs/ctn

Z u }š }všŒ}o